

T- GS15-40 (12,5 - 30 Amp.) 230-440V AC 50/60Hz.



G.S.E.I. Controlli
Elettronica
Industriale



ZERO-CROSSING THREE PHASE STATIC RELAYS.

Suitable to control three phase resistive loads.

Internal protection against overvoltages.

Logic control 12-24V DC 20mA. and signalling LED.

Forced ventilation (24V DC 0.15A) and Thermostat 80°C


(N.C. 2A 230V) for the version T-GS40.

Hooking for DIN rail.



| Model | Item | I2t 10mS. | Weight | Dimension | |
|--------|------|-----------|--------|-----------|---------|
| T-GS15 | 5920 | 125 Amp. | 0,80kg | H.100mm | L.60mm |
| T-GS40 | 5925 | 880 Amp. | 1,00kg | H.147mm | P.115mm |

COLLEGAMENTO ELETTRICO

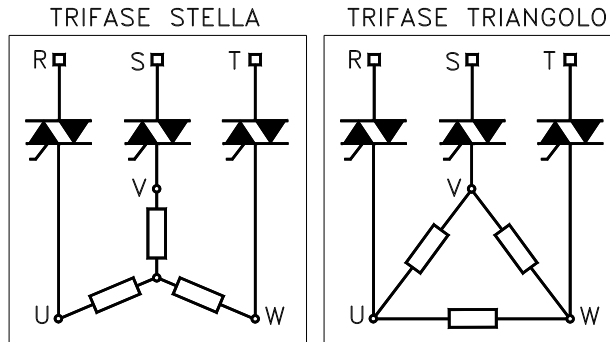

Switching current at ambient temperature

